


**Racire:**

**A++  
SEER: 6.1**

**Incalzire:**

**A+  
SCOP: 4**

**R32**

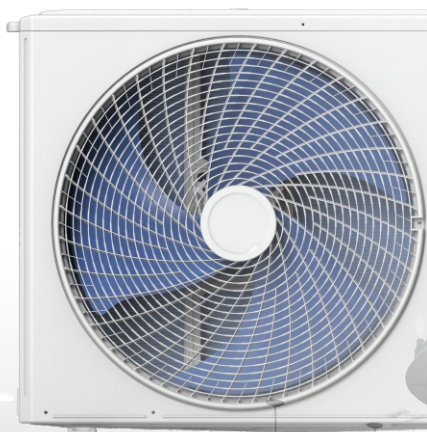

Model			PCOL-24R32
			R32
Capacitate racire		kW	7.03(8.9-7.26)
Capacitate incalzire		kW	7.2(8.9-7.92)
SEER			6.1
Clasa energetica pt racire			A++
SCOP			4
Clasa energetica pt incalzire			A+
Consum anual	Racire	kWh/a	402
	Incalzire	kWh/a	1995
Capacitate dezumidificare		L/h	2.4
Nivel zgomot U. Interioara (Turbo-Hi-Mid-Low-Si)		dB(A)	47
Nivel zgomot U. Exterioara		dB(A)	56
Date electrice			
Alimentare			220-240V~/50Hz/1P
Curent de operare	Racire	A	10.1(1.6-13.7)
Curent de operare	Incalzire	A	9.5(1.6-14.1)
Putere consumata nominala	Racire	kW	2.24
Putere consumata nominala	Incalzire	kW	2.1
Curent maxim de intrare		A	14.5
Putere consumata maxima		kW	3.1
Sistemul frigorific			
Refrigerant/Incarcare Kg			R32/1.5
Compresor	Tip		Rotativ
			SANYO
Volum aer interior (Hi-Mid-Low-Si)		m3/h	1200
Volum aer exterior		m3/h	2600
Dispozitiv de expansiune		tip	VALVA
Tevi Conexiune	Gaz	Inches	1/2"
	Lichid	Inches	1/4"
Altele			
Aria aplicabila		m <sup>2</sup>	35~60
Lungime maxima traseu		m	15
Diferenta max de inaltime		m	5
Temperatura ambient ( Racire / Incalzire)	Exterior	°C	Rac :0~48/ Inc : - 15~24
	Interior	°C	Rac: 18~32/ Inc: 0~27
Dimensiuni nete (W x H x D)	Interior	mm	348×1750×348
	Exterior	mm	349×853×602
Greutate neta	Interior	kg	27
	Exterior	kg	36

